www.flex-tools.com

this is proformance FLEX

# XCE 10-8 125


## Eccentric polisher with forced rotation

## Order no. 418072

## GTIN 4030293180550




- 8 mm polishing stroke, positive-action drive provides high abrasive power without creating any holograms
- Basic tool for tackling the most common surface problems through to finishing without creating any holograms
- Low heat generation on the surface makes it ideal for temperature-sensitive paints
- Powerful 1010 watt motor with highly-efficient ventilator for optimum cooling
- Optimised air flow for optimum cooling of motor and gear. No annoying exhaust air for the user
- Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- VR microprocessor control: with tachogenerator constant speed control, soft start, continuous speed control trigger, restart protection after power failure, overload protection, temperature monitoring and speed selection
- Flat gear head reduces distance to the surface. The machine can therefore be operated safely in any position.
- Counterweight for smoother operation
- Cushioned special hook and loop pad for polishing.
- Grip hood: ergonomically shaped with SoftGrip. The machine can be controlled with precision and is always comfortable yet secure to hold.
- With rubberised resting bar for safe setting down
- 4 metres PUR H05-BQF cable: wear-resistant, flexible and highly resistant to cuts and abrasions

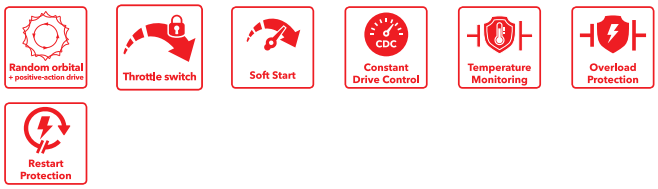


## Technical data

| | |
|---|---|
| Power consumption | 1010 W |
| Power output | 590 W |
| Voltage | 230 V |
| Frequency | 50/60 Hz |
| Max. polishing disc size | 160 mm |
| Max. support plate size | 150 mm |
| Polishing stroke | 8 mm |
| No-load speed | 140 - 440 rpm |
| Orbit rate, no load | 2900 - 8600 rpm |
| Cable length | 4,0 m |
| Cable type | PUR |
| Dimensions WxLxH | 383 x 40 x 140 mm |
| Weight | 2,6 kg |

## Standard equipment

1 Special hook-and-loop pad, cushioned (487953)