FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

Accessories


Sanding belt CERAFLEX



Technical attributes			
Dimensions in mm	Grit	QTY/PKG	Order number
760 x 40	60	10	438.510
760 x 40	80	10	438.529
760 x 40	120	10	438.537

Flexible high-performance sanding belt for optimum sanding performance, with high abrasion performance and an extremely long service life thanks to self-sharpening, micro-crystalline ceramic grit for preliminary and intermediate sanding on stainless steel surfaces. Cool sanding thanks to additional multi-bonding.

Sanding belt CORUFLEX

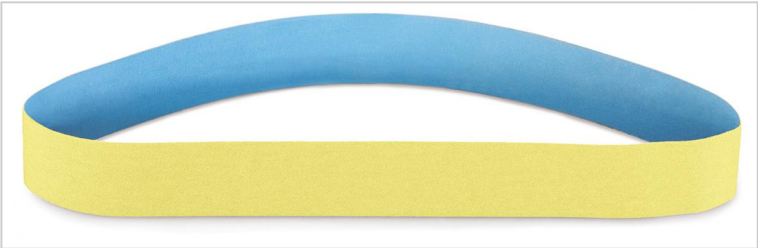

Technical attributes			
Dimensions in mm	Grit	QTY/PKG	Order number
760 x 40	P 80	10	326.739
760 x 40	P 120	10	326.755
760 x 40	P 180	10	434.906
760 x 40	P 240	10	434.914

Highly flexible sanding belt with annealed corundum grit and active-sanding agents for finishing stainless steel. Particularly suitable for finish sanding.

Sanding belt MESHFLEX



Technical attributes			
Dimensions in mm	Grit	QTY/PKG	Order number
760 x 40	A 100	3	326.895
760 x 40	A 240	3	326.879
760 x 40	A 400	3	326.852

For removing minor damage, scratches, tarnish, flash rust, scale and dirt. Removing tarnish at welds without heat distortion at thin plates. For grinding, cleaning and finishing stainless steel, steel, titanium alloys, light metals, non-ferrous metals and plastics.