
FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

Accessories

Sanding belt MESHFLEX

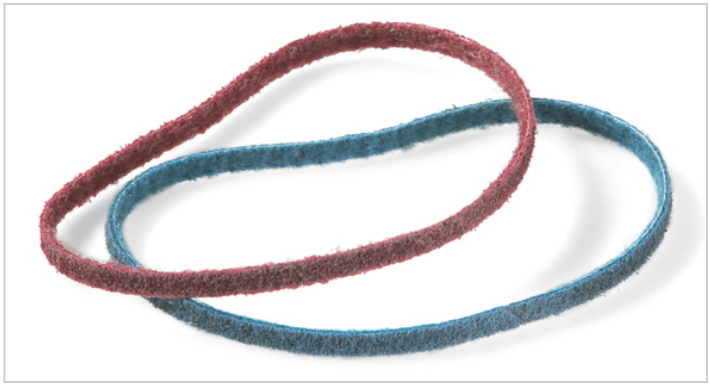

Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
533 x 9	A 240	3	318.663
533 x 9	A 400	3	318.671

For removing minor damage, scratches, tarnish, flash rust, scale and dirt. Removing tarnish at welds without heat distortion at thin plates. For grinding, cleaning and finishing stainless steel, steel, titanium alloys, light metals, non-ferrous metals and plastics.

Sanding belt MESHFLEX



Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
533 x 30	A 100	3	434.868
533 x 30	A 240	3	318.647
533 x 30	A 400	3	318.655

For removing minor damage, scratches, tarnish, flash rust, scale and dirt. Removing tarnish at welds without heat distortion at thin plates. For grinding, cleaning and finishing stainless steel, steel, titanium alloys, light metals, non-ferrous metals and plastics.