
FLEX-Elektrowerkzeuge GmbH
Bahnhofstraße 15
71711 Steinheim
Phone +49 7144 828-0
Fax +49 7144 25899
info@flex-tools.com
www.flex-tools.com

Accessories

Velcro sanding paper ZIRCOFLEX

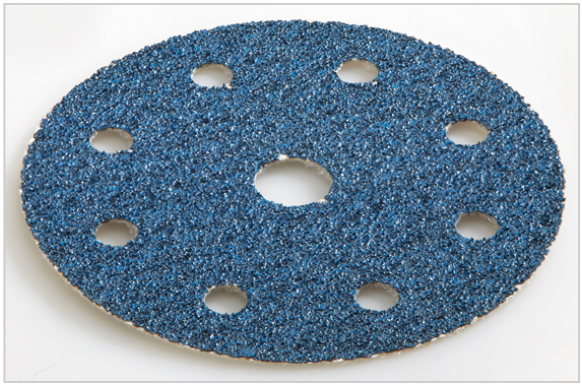

Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
125 Ø	A 40	25	393.185
125 Ø	A 60	25	393.193
125 Ø	A 80	25	393.207

Ideally suited for high removal rates and high load on wood and metal substrates. The support fabric is extremely tear-resistant and is characterised by high cost-effectiveness. Can be used with velcro pad max. Ø 125 mm.

Velcro sanding paper CERAFLEX



Technical attributes

Dimensions in mm	Grit	QTY/PKG	Order number
125 Ø	K 80	50	393.215
125 Ø	K 120	50	393.223
125 Ø	K 180	50	393.231

Ideal for sanding stainless steel surfaces and grinding weld seams. The support fabric is extremely tear-resistant. Low heat generation and longer service life ensure high cost-effectiveness. Can be used with velcro pad max. Ø 125 mm.